


Liebert's[®] Small Space Cooling Solutions

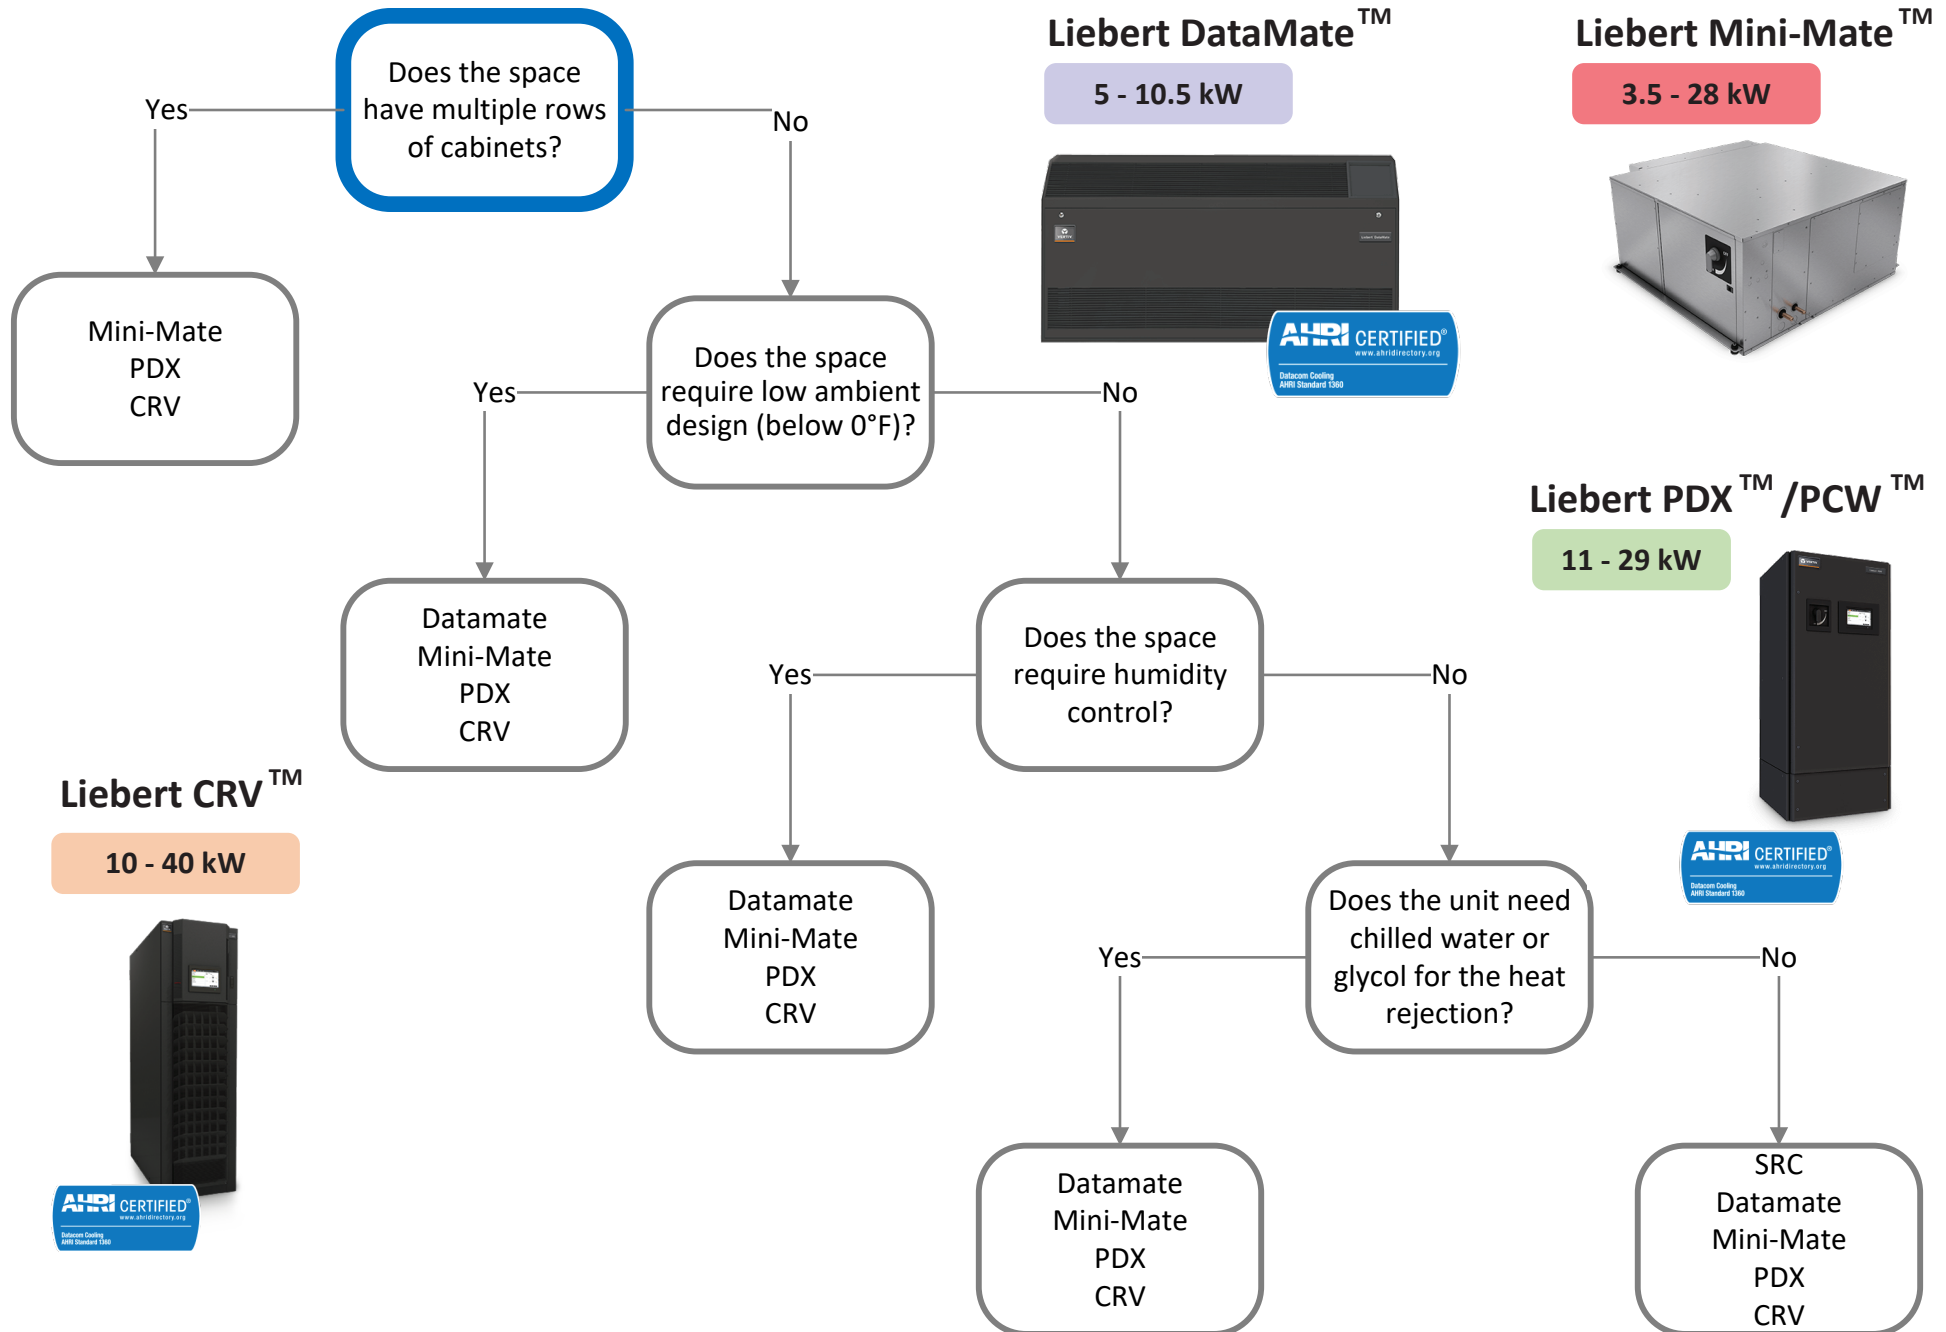

Liebert's[®] Small Space Cooling Solutions

FEATURES	Liebert Datamate™	Liebert Mini-Mate™	Liebert PDX™/PCW™	Liebert CRV™
Capacity	1.5 - 3 tons 5 - 10.5kW	1 - 8 tons 3.5 - 28 kW	3 - 8 tons 11 - 29kW	5 - 11 tons 10 - 40kW
Humidity Control	Y	Y	Y	Y
Heat Rejection Type	Air; Chilled Water; Glycol	Air; Chilled Water; Glycol	Air; Chilled Water; Glycol	Air; Chilled Water; Glycol
Split System (Compressor outdoors)	Y	Y	N	N
Self-Contained System (Compressor internal)	N	Y	Y	Y
Energy Efficiency Measures	SCOP ³	SCOP ³	SCOP ³	SCOP ³
BMS Protocols	BACnet, Modbus IP and 485	BACnet, Modbus IP and 485	BACnet, Modbus IP and 485	BACnet, Modbus IP and 485
Alarm / Text Protocols	SMS, SMTP	SMS, SMTP	SMS, SMTP	SMS, SMTP
Localized Monitoring	Y	Y	Y	Y
Mobile Application Monitoring	Y	Y	N	N
Low ambient Temperature <0° F	Y	Y	Y	Y
Form Factor	Wall-mount	Ceiling-mount	Floor-mount	In-Row
Relative Price	\$\$	\$\$	\$\$\$	\$\$\$

¹SEER = Season Energy Efficiency Ratio

²HSPF = Heating Season Performance Factor

³SCOP = Seasonal Coefficient of Performance